



ABS 15 P



ABS 15 S



ABS 15 ST

Wrappers

Easy wrapping



ABS is an ideal bale wrapper both in the field and on the farm, its excellent economic ratio allows everyone to be independent and be able to carry out the work when it is deemed most appropriate.

2 hydraulic outlets, connected to the tractor, powered hydraulically the distributor and the flexible cables allow the commands from the tractor.

Incorporated hydraulic system (option).



There are 3 versions that share the same frame:



- **ABS 15 P** mounted wrapper without loading/unloading arm, can be equipped with a remote radio control.
- **ABS 15 S** trailed wrapper, equipped with upper arm for loading and unloading operations, film blocking and automatic cutting on overturning.
- **ABS 15 ST** trailed wrapper, equipped with gripper for bale loading/unloading, film locking and automatic cutting on overturning.




Remote control with radio frequency (for mod. P).


Electronic revolution counter (control number of turns, partial and total numbers of bales).

Electro-hydraulic commands.

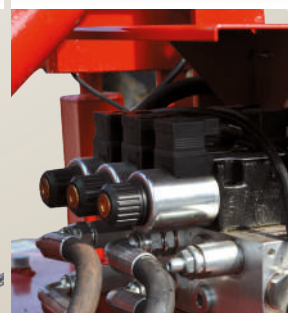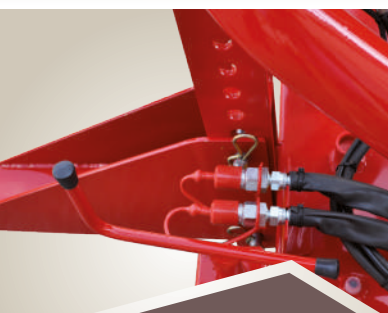


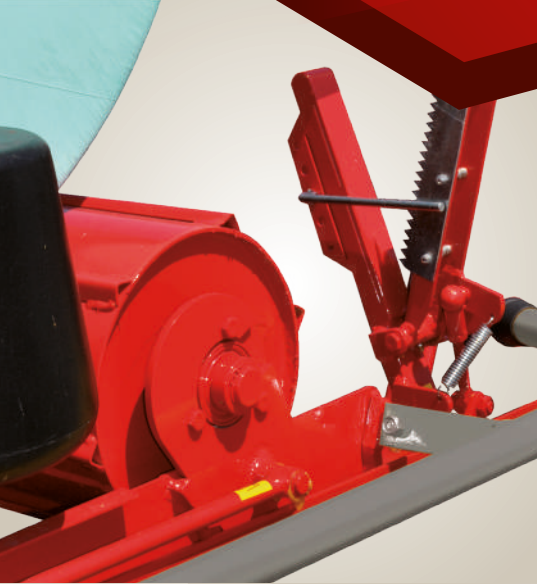

Automatic cutting of the film at the moment of tilting. (S and ST versions).

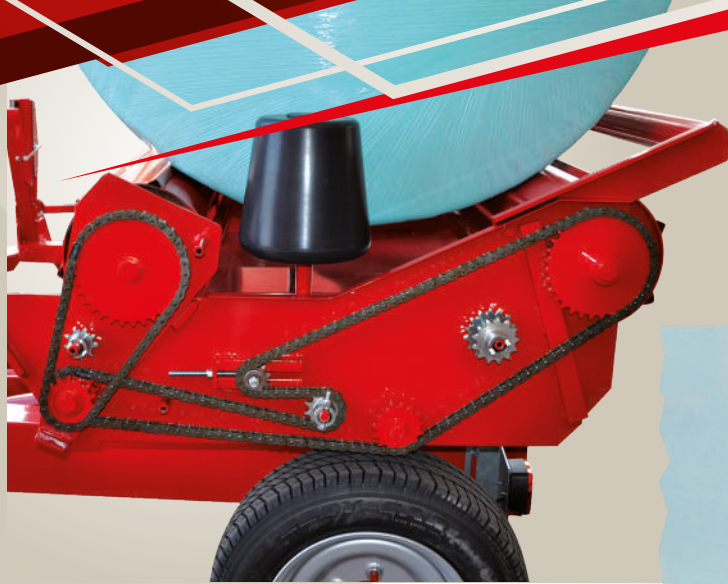

2 driving rollers, 1 of which is tilting, positioned on the platform, with 4 adjustable speeds, guarantee optimal work with all the dimensions of the bale.

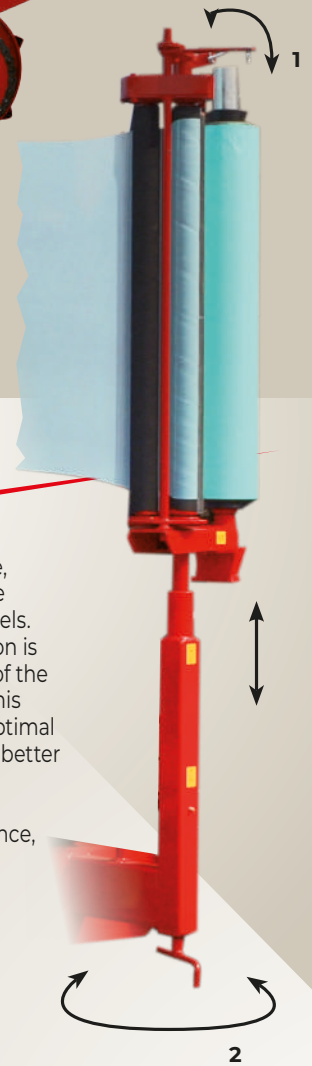

The film extender device, of our production, please to use 500 or 750 mm reels. The reel loading operation is facilitated by the tilting of the reel holder housing (1), this mechanism allows for optimal tension adjustment and better extension of the film. A crank (2) placed at the base of the appliance, allows you to position the coil in all simplicity in the center of the bale.



The tilting roller permits wrapping of bales with diameter between 90 and 160 cm.



Work phases with radio control (on P version):

- load the bale to be wrapped (for the first bale the film must be fixed manually);
- start the rotation of the platform;
- the machine carries out the set winding turns;
- the platform stops on its own when the revolutions are reached;
- give the platform lifting command for unloading the bale, without cutting the film;
- load another bale on the film still to be cut;
- when starting a new cycle a knife placed at the end of the rear roller will perform the cut of the film.



	ABS 15 P	ABS 15 S	ABS 15 ST
Length (mm)	2450	3450	3450
Width (mm)	1800	1800	1800
Height (mm)	2100	2250	2250
Weight (Kg)	850	1000	1100
Hydraulic connections to the tractor	Hydraulic double - acting	Hydraulic double - acting	Hydraulic double - acting
Connection to tractor	3 points	Drawbar + 3 points	Drawbar + 3 points
Bale size (mm) Ø	900 ÷ 1600	900 ÷ 1600	900 ÷ 1600
Coil size (mm)	500 - 750	500 - 750	500 - 750
Tires	-	205/60-15	205/60-15

Film layers

500	Z9	3	3+3
	Z11	2	2+2
	Z13	1.5	1.5+1.5
	Z15	1	1+1
750	Z9	4	4+4
	Z11	3	3+3
	Z13	2	2+2
	Z15	2	2+2

